

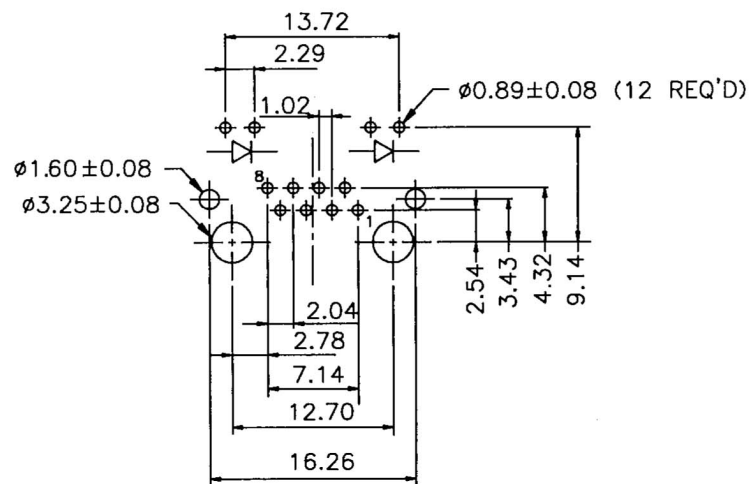


LED SCHEMATIC



PCB LAYOUT



MATERIAL AND FINISH

Housing: Standard Material Glass Filled Polyester UL 94V-0
Standard Color Black.

Contact: 0.35mm Thickness Phosphor Bronze,

Gold Plating Over Nickel in Contact Area.

Tin Plating Over Nickel in Solder Area.

Shielded: 0.25mm Thickness Copper Alloy With Tin/Nickel Plated.

Gold Plating: Selective Gold Plating.

ELECTRICAL:

1. Current Rating : 1.5 AMP
2. Voltage Rating : 150 VAC
3. Contact Resistance : 20 Milliohms MAX
4. Insulation Resistance : 500 Milliohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min

RoHS Compliant	HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.		
APPD. 核准 Betty		PART NAME 品名	
DWG. 製圖 Betty	SCALE 比例 參考	LED JACK 8P8C WITH LED SKYLIGHT TYPE BLACK COLOR	
DATE 制表日 2007/4/14	UNIT 單位 MM	PART NO. 料號 C0073-AAYXB00XR	
	PAGE 張數 1 OF 1		